

OGS10

PRODUCT DATASHEET

1. MAIN FEATURES

Description

The OGS10 lock is a keypad electronic camlock that secures access to small spaces, including cabinets, drawers, lockers, and other types of small to medium-sized furniture.

The OGS10 lock can easily replace existing mechanical cylinder locks, complying with all dimensional and locking standards.

This solution is equipped with integrated handle and nozzle for DDA / ADA.

Configuration

- Free, dedicated and dedicated with auto-locking mode
- Vertical, Horizontal Right and Left hand

Compatibilities



- All door types from 6 to 20mm (*Lockers* version)
- All door types from 16mm to 20mm (*Furniture* version)

Maintenance

- Master code
- Mechanical emergency opening key

Safety

- Interchangeable cylinder
- 4mm stainless steel latch hook

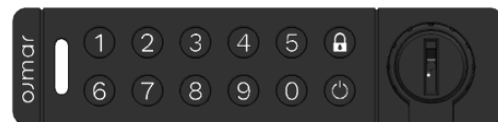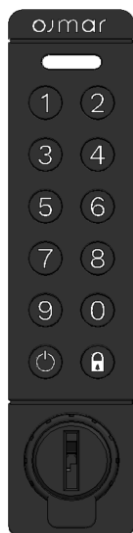

2. LOCK ORIENTATION

LOCKERS

VERTICAL



RIGHT HAND HORIZONTAL



LEFT HAND HORIZONTAL



FURNITURE

VERTICAL




RIGHT HAND HORIZONTAL



LEFT HAND HORIZONTAL



ADAPTER



3. TECHNICAL SPECIFICATIONS

AUTHENTICATION METHODS	Authentication method	Pin code
USE MODES	Free Mode	Configurable 4, 5 or 6 digits user code
	Dedicated Mode	Configurable 4, 5 or 6 digits user code
	Dedicated with auto-closing mode	Configurable 4, 5 or 6 digits user code
USER INTERFACES	Notifications	LEDs (Red, amber & Green) and Buzzer
POWER SUPPLY	Batteries (Type & quantity)	Two CR2032 Primary Lithium Batteries
	Battery life	Up to 6 years (depends on use) / 10.000 cycles
MECHANICAL CHARACTERISTICS	Dimensions	111 x 26 x 15.5 mm
	Weight	215g
	Close resistance	DIN EN 16014:2011-10
	Housing	Black (logo and icons in Pantone 420C)
ENVIRONMENTAL CONDITIONS	Temperature	From 0°C to +50°C (interiors)
	Humidity	UNE EN ISO 6270-2

4. OTHER DATA

Furniture Material	• Phenolic • Glass • Metal • HPL • Melamine
Door Thickness	From 6mm to 20mm (<i>Lockers version</i>) <i>*For doors between 1mm and 6 mm thickness and doors above 20mm thickness, please consult to OJMAR.</i> From 16mm to 20mm (<i>Furniture version</i>) <i>* For doors between 1mm and 16 mm thickness and doors above 20mm thickness, please consult to OJMAR.</i>
Hand	Right / Left
Lock Orientation	Vertical / Horizontal
Retrofitting	Retrofittable with OJMAR UNO line locks removing interchangeable cylinder from the mechanical lock. 


5. OPTIONAL ACCESSORIES

→ Mechanical emergency opening key


6. TECHNICAL DRAWINGS

6.1. LOCK

LOCKERS


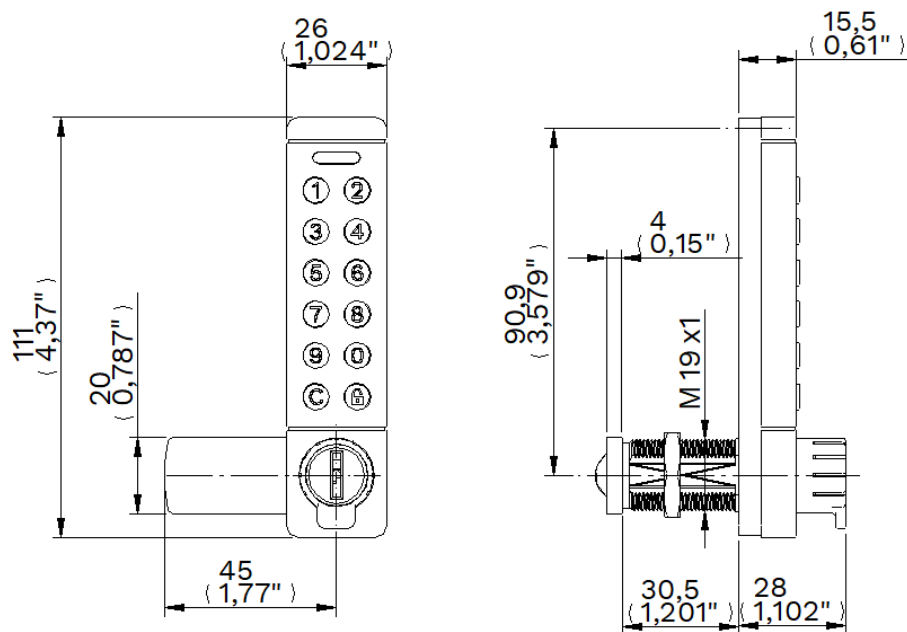


FURNITURE


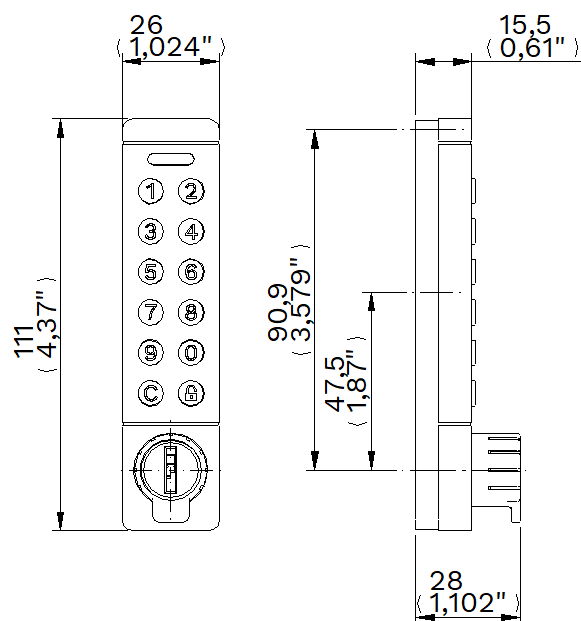


6.2. ASSEMBLY

LOCKER

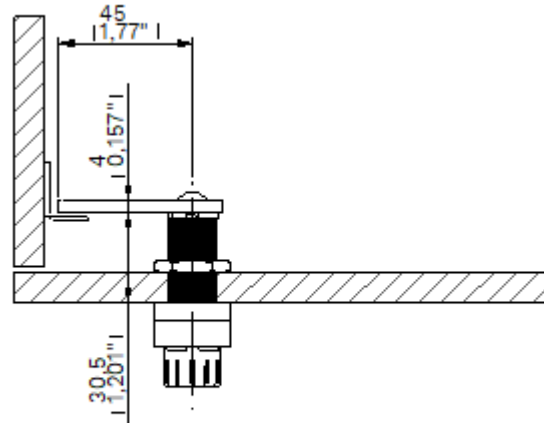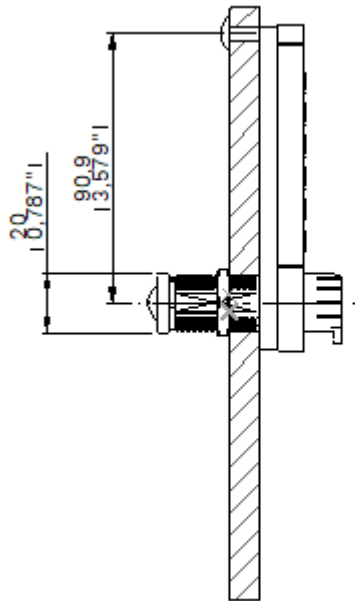


FURNITURE

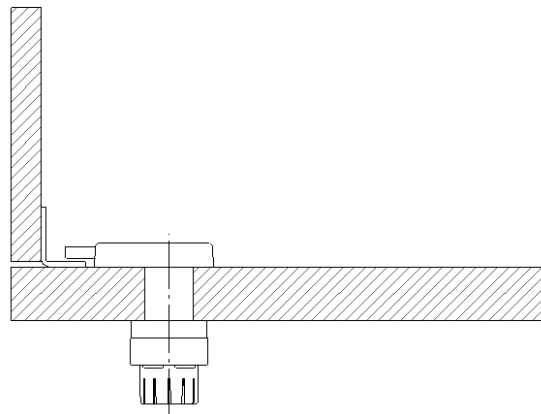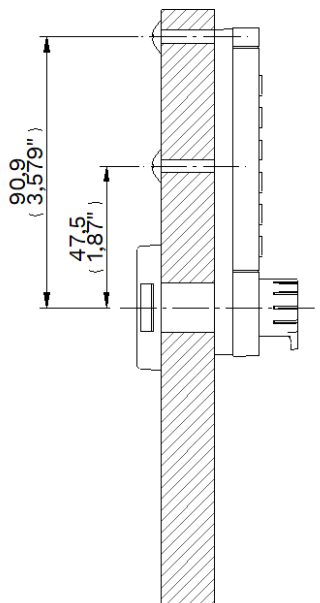


6.3. FIXING HOLES

LOCKER

Metal door

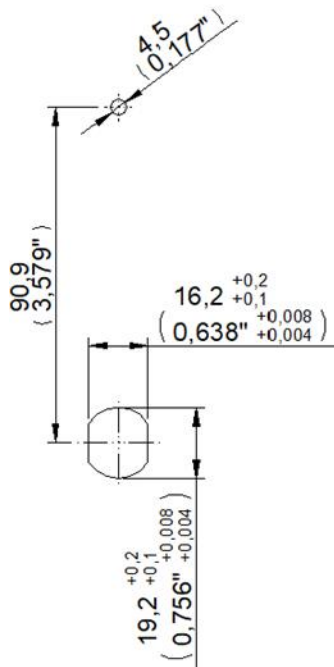

Phenolic/Chipboard doors

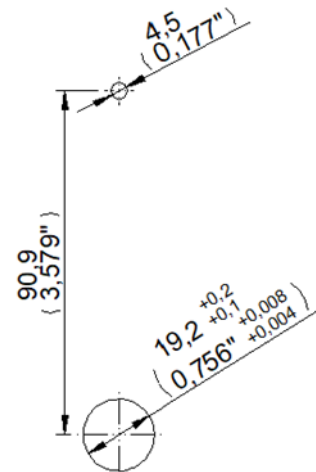

FURNITURE

